


SEZ[®]
DOLNÝ KUBÍN


Junction boxes ACIDUR 3 6455-11 5.P, 6455-12 5.P

NEWS

**HIGHER QUALITY FOR
THE SAME PRICE**

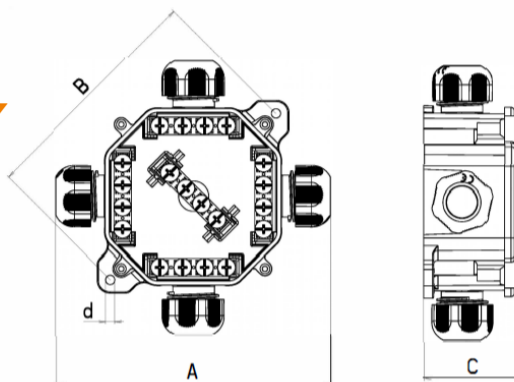

Lamellar Pg glands
with blinded elastic
sealing ring

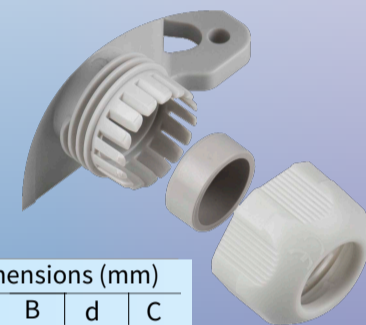

Ord. No. (Type)	Rigid conductor max. cross section (mm ²)	Bridges/screws			Sealing range (mm)	Colour	Pkg. (pcs.)	Dimensions (mm)			
		L	N	PE				A	B	d	C
400022 (6455-11 5.P/2 ACIDUR 3)	4	3/4	1/4	1/4	7 - 14,5	grey	50	125	106	4,2	45
400023 (6455-11 5.P/5 ACIDUR 3)						black					
400024 (6455-11 5.P/7 ACIDUR 3)						brown					
400025 (6455-12 5.P/2 ACIDUR 3)	4	3/4	1/4	-	7 - 14,5	grey	50	125	106	4,2	45
400026 (6455-12 5.P/5 ACIDUR 3)						black					
400027 (6455-12 5.P/7 ACIDUR 3)						brown					

BENEFITS:

- smaller outside dimensions providing the same usage
- larger inside installation space
- retained mounting possibility of the same max. cable cross-sections
- cable sealing with a single elastic sealing ring
- ensured sealing after cutting off the preinjected blanks even without a cable
- innovative screwless fastening system of connecting bridges
- quality PA plastic with higher UV resistance
- smaller dimensions of implemented Pg glands
- mechanical resistance IK08

PARAMETERS:

- material: PA - halogen-free
- nominal insulation voltage: 400 V~
- operating temperature: -25 °C to +60 °C
 - complies with standard:
 - STN EN 60670-1, STN EN 60670-22
 - degree of protection: IP67



30 sec.



850 °C



without a pad pad needed



$I_{max} \leq 16 A$

$I_{max} > 16 A$

**SEZ DK a.s., M. R. Stefanika 1831/46
026 19 Dolny Kubin, Slovakia**

Tel.: +421 43 5809 226; +421 43 5809 258, e-mail: sales@sez.sk

MEMBER OF **FPD**

WWW.SEZ.SK